



# Flexible 4.0 mm and 6.5 mm videoendoscope

"LHC4.0-6.0/DUAL VISION"

**COBB**  
FIBRE OTTICHE




Dual camera:  
Front camera 0°  
Side camera 90°

COBB FIBRE OTTICHE SRL


Via Nelson Mandela, 20 | 24048 Treviolo (BG) | Italy Tel. +39 035 0448601 - Fax +39 035 0448585  
info@fibre-ottiche.com - www.endoscopi-industriali.it

# Flexible 4.0 mm and 6.5 mm videoendoscope

"LHC4.0-6.0/DUAL VISION"

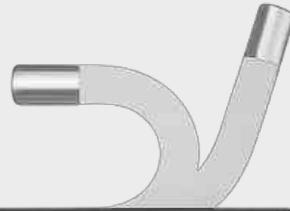

**IP67 PROBE**  
Fully immersible  
waterproof probe

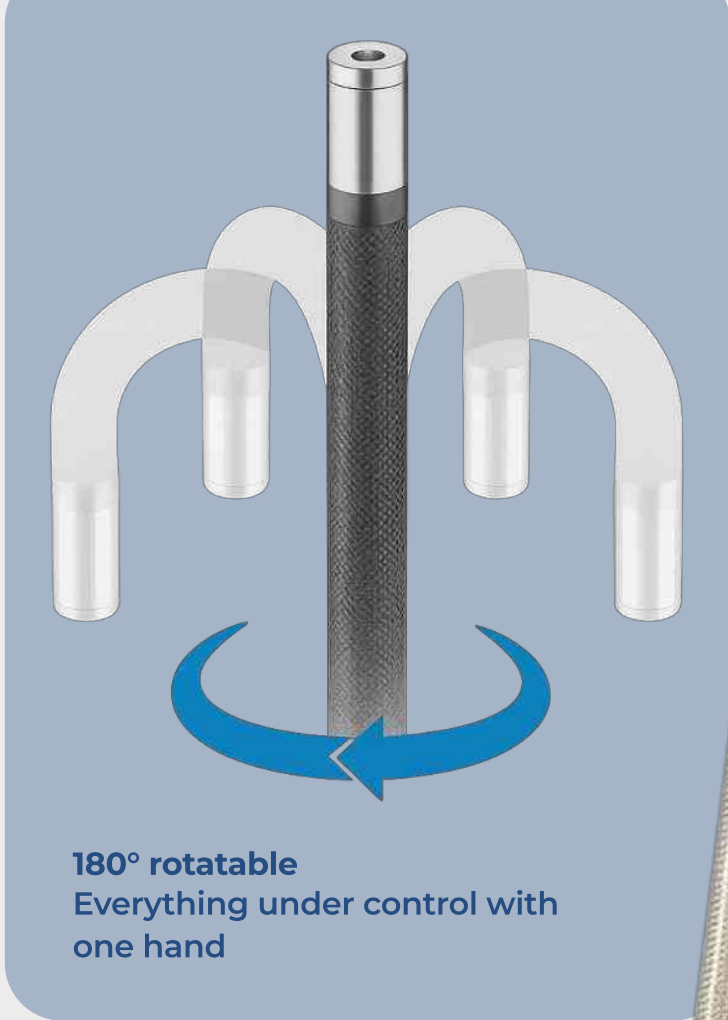

**180° rotatable**  
Everything under control with  
one hand

Front view camera



Side view camera



Dual camera

# Flexible 4.0 mm and 6.5 mm videoendoscope

“LHC4.0-6.0/DUAL VISION”



One-hand operation of probe articulation functions,  
photo, video recording and brightness adjustment

Joystick  
articulation  
joystick


High-definition  
images – 5.0” IPS  
Full-Color monitor

Articulation  
lock/unlock

Photo/Video  
Brightness  
adjustment



COBB FIBRE OTTICHE SRL  
Via Nelson Mandela, 20 | 24048 Treviolo  
(BG) | Italy Tel. +39 035 0448601  
- Fax +39 035 0448585  
info@fibre-ottiche.com-  
www.endoscopi-industriali.it

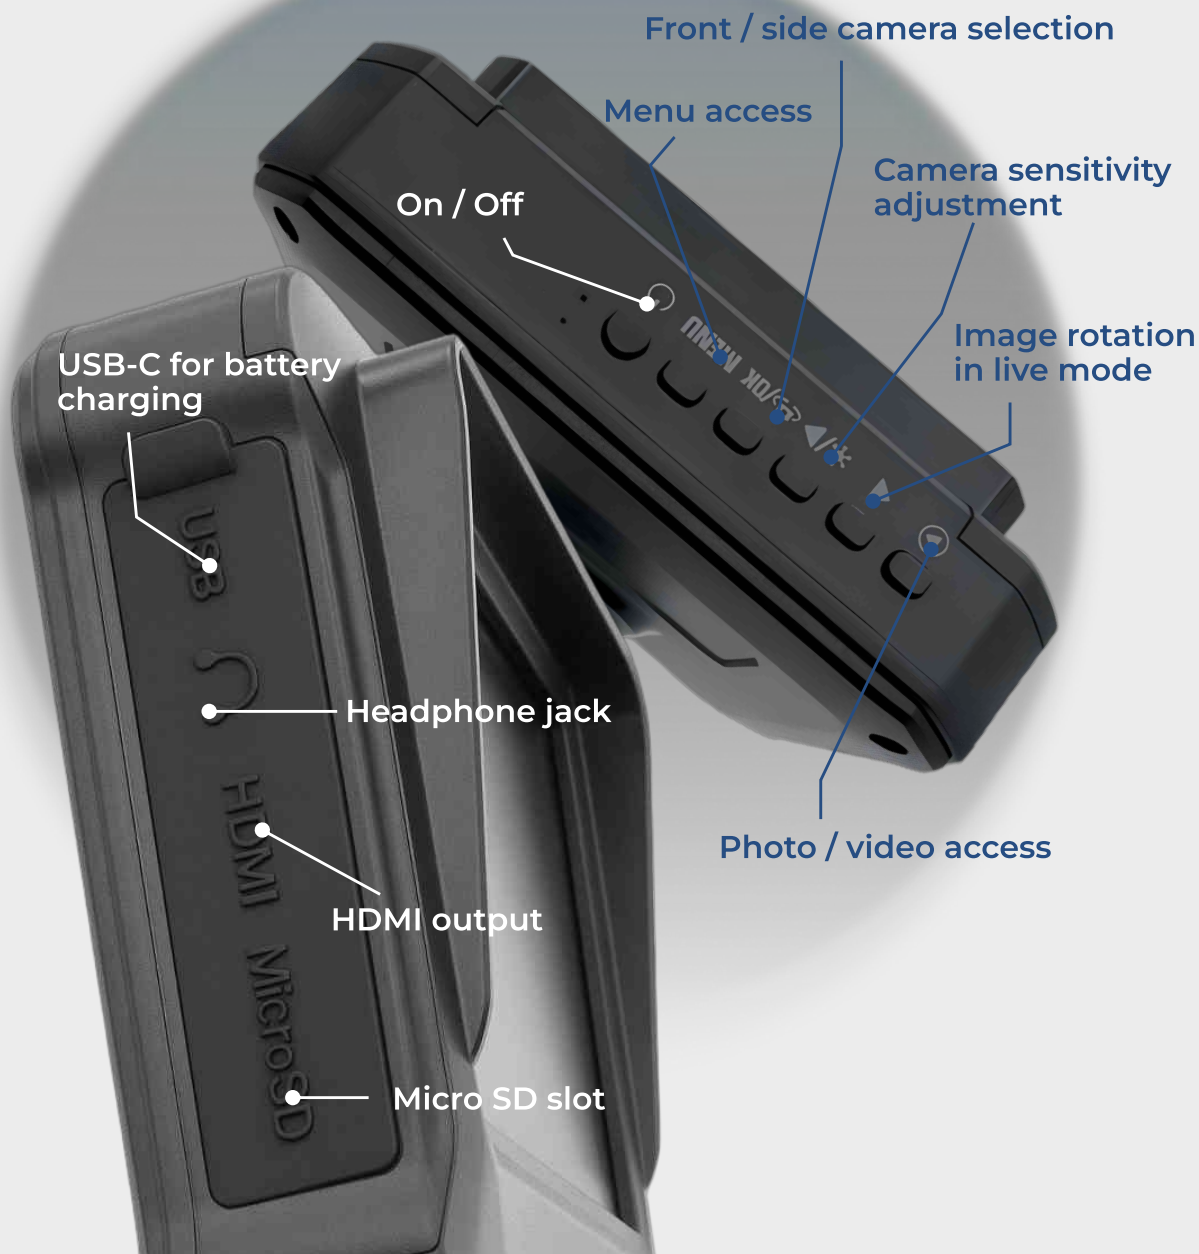

Front / side camera selection

Menu access

Camera sensitivity adjustment

Image rotation in live mode

Photo / video access

On / Off

USB-C for battery charging

Headphone jack

HDMI output

Micro SD slot

## Flexible 4.0 mm and 6.5 mm videoendoscope

“LHC4.0-6.0/DUAL VISION”



COBB FIBRE OTTICHE SRL

Via Nelson Mandela, 20 | 24048 Treviolo (BG) | Italy Tel. +39 035 0448601 - Fax +39 035 0448585  
info@fibre-ottiche.com - www.endoscopi-industriali.it

# Flexible 4.0 mm and 6.5 mm videoendoscope

“LHC4.0-6.0/DUAL VISION”



Available diameters with forward view 0°

4,0mm- 6,5mm

Field of view

120°- 190°

Viewing head articulation

4 vie - 360°

Monitor features

IPS Full-Color

Probe head articulation angle

180°

Battery charger and mains power supply

Power: 5V/2A

Viewing direction

Forward 0° – Lateral at 90°

Photo and video

Stored on SD card

Monitor

LDC 5.0”

Anti-reflection system  
White balance  
Sensitivity boost

Automatic

Power supply

Lithium batteries,  
3350mAh and/or mains  
power supply 110/220VAC

Depth of field V/0°  
Depth of field V/90°

From 10 mm to infinity  
From 5 mm to 200 mm

Video signal output

HDMI / USB-C / Wi-Fi

Image control functions

Image rotation, photo/video  
preview

Camera pixels

1.000.000

Temperature resistance

Operating and storage  
temperatures: -20°C +60°C

Waterproof

IP67

Available lengths

4,0mm: 1,5mt - 2,0mt - 3,0mt  
6,5mm: 1,0mt - 2,0mt - 3,0mt - 5,0mt

Lighting

LEDs positioned at the probe tip



COBB FIBRE OTTICHE SRL

Via Nelson Mandela, 20 | 24048 Treviolo (BG) | Italy

Tel. +39 035 0448601 - Fax +39 035 0448585

info@fibre-ottiche.com - www.endoscopi-industriali.it